



INSTALLATION

RAZOR EYES-AMBER-SINGLE FUNCTION

2505

PARTS INCLUDED

- | | |
|---|--|
| 2 | Razor Eyes—Amber—with M10 X 1.25 Threads on Stud |
| 1 | Hardware Kit Containing |
| 6 | Female T-Tap Connectors |
| 6 | Male Spade Connectors |
| 1 | Dielectric Grease Pack |
| 1 | Installation Instructions |

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.

WARNING! THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

ATTENTION! This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

TOOLS SUGGESTED

Set of Combination Wrenches, Wire Crimping Tool, Test Light, Pliers

STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.


STEP 1

Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition.

ATTENTION! The Razor eyes are intended to be used as supplemental lighting only. Any other use may be in violation of Federal, State or local regulations.

STEP 2

Find a location on the bike to mount the Razor Eyes. You will need a hole at least 3/8" in diameter for the stud (thread is M10 X 1.25) on the Razor eye to fit through. The stud extends 3/4" past the 5/8" diameter flat mounting surface of the Razor Eye. PIC 1

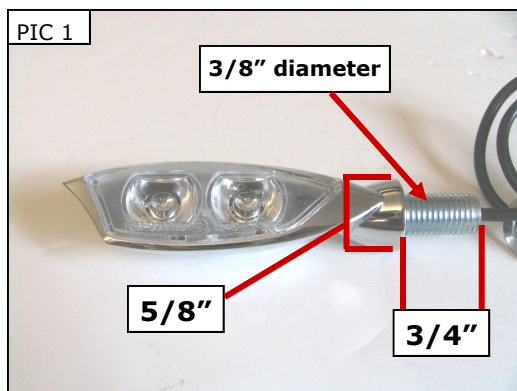

CUSTOMER SERVICE

877.370.3604 (toll free)

INSTALLATION QUESTIONS

techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY

Küryakyn warrants that any Küryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Küryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
- The product must be properly installed, maintained and operated under normal conditions.
- Küryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
- Küryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Küryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Küryakyn and a customer.
- Küryakyn products are often intended for use in specific applications. Küryakyn makes no warranty if a Küryakyn product is used in applications other than intended.
- Küryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'S contained in components of Küryakyn products will be warranted for defects in materials and workmanship for 3 years from the date of purchase where as all other components shall be warranted for one(1) year. This includes, but is not limited to; control modules, wiring, chrome & other components.
- Küryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Küryakyn. Küryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

For purchasing Küryakyn® products, you can receive a complete catalog free of charge. Send the Proof-of-Purchase below with your address to: Küryakyn, P.O. Box 339, Somerset, WI 54025. Please indicate either Accessories Catalog for Harley-Davidson® or GL & Metric Cruisers.

Be sure to ask your local dealer about other Küryakyn® products, the motorcycle parts and accessories designed for riders by riders.

©2005 Küryakyn USA® All Rights reserved.



-cont.-

2505-21MC-0711

kuryakyn.com

STEP 3 Insert the stud of the razor Eye through the chosen hole and secure from the back side with the included hex nut and lock washer. **DO NOT** over-tighten the nut on the hollow stud.

STEP 4 Determine if you would like to use the Razor Eyes as supplemental turn signals or running lights. **Turn the key "ON"** and using a test light or the wiring diagram for your bike, determine a "keyed" 12 volt power wire (one that has power when the key is on and loses power when the key is off), for wiring as running lights or determine which wires are the turn signal power, left and right, on the bike and a ground wire. **Turn the key "OFF", disconnect the battery** and attach one of the included Female T-Tap connectors to each of these wires. FIG 1

ATTENTION! Küryakyn recommends the use of dielectric grease on electrical connections.

STEP 5 Attach one of the included Male Spades to the RED wire from the Razor Eye and plug the RED wire from the Razor Eye to the Female T-Tap on the power or turn signal wire from Step 4. Attach a Male Spade to the BLACK wire from the Razor Eye and plug it into the Female T-Tap on the ground wire. FIG 1 Reconnect the battery.

ATTENTION! Secure all wiring away from any moving parts, pinch points or extreme heat. Küryakyn **WILL NOT** issue a warranty on any electrical component that fails due to pinched, crimped, broken, abraded, melted or frayed wires.

STEP 6 Secure the wiring out of harms way. Test the lights to make sure they operate correctly.

WARNING! ENSURE PROPER LIGHT OPERATION BEFORE RIDING THE MOTORCYCLE. VISIBILITY IS A MAJOR CONCERN FOR MOTORCYCLISTS. A LIGHTING MALFUNCTION COULD RESULT IN DEATH OR SERIOUS INJURY.

